



## AR26


Compaction of in-situ Concrete



The specialist for first class concrete surfaces: AR26

Wacker Neuson external vibrators have been used for concrete consolidation for many years. This AR26 external vibrator was designed specifically for cast-in-place formwork as well as light precast concrete applications. Its low weight, compact size, and ability to keep a constant speed under load make it the preferred external vibrator for concrete consolidation worldwide.

- Continuous duty thanks to its powerful, well designed electric motor
- Specially designed for cast-in-place jobsite applications or light precast
- Fast assembly thanks to easy to use fastening clamps
- Brushless asynchronous motor alleviates the need to change brushes
- LED operating indicator display and sealed grease bearings

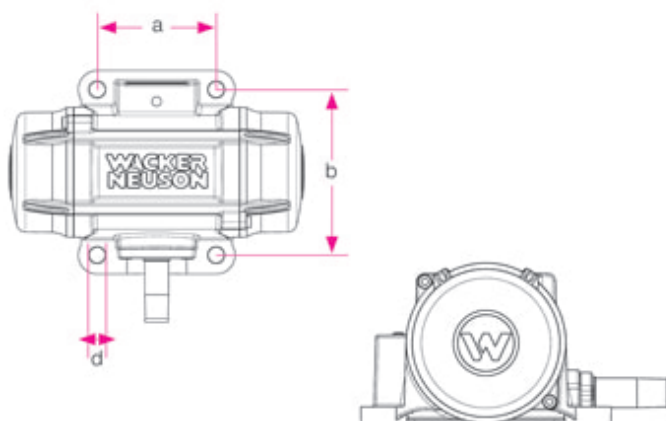

	d mm	a mm	b mm
AR/ARFU 26	11	90	125
AR 36			
AR 43	18	90	154
AR 53			
AR 34			
AR 54	17,5	120	120
AR 64			
AR 75	17	95	180



**WACKER  
NEUSON**  
*all it takes!*



## Technical specifications

### AR26

	AR26/6/042	AR26/6/042 cs
Vibrations rpm	6,000	6,000
Centrifugal force max. lbf	780	780
Rated voltage 3~ V	42	42
Rated current A	8	8
Weight lb	13.67	16.53
L x W x H in	9.1 x 8.9 x 4.1	
Cable length ft	32.8	32.8

#### **Please note**

that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions.

Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2018 Wacker Neuson SE.